




POTENSKY  
Kotorská 1573/20  
Praha 4 - 140 00  
tel/fax:(420) 272 767 916


# POT 50 W CE

www.potensky.cz  
potensky@volny.cz  
Czech Republic

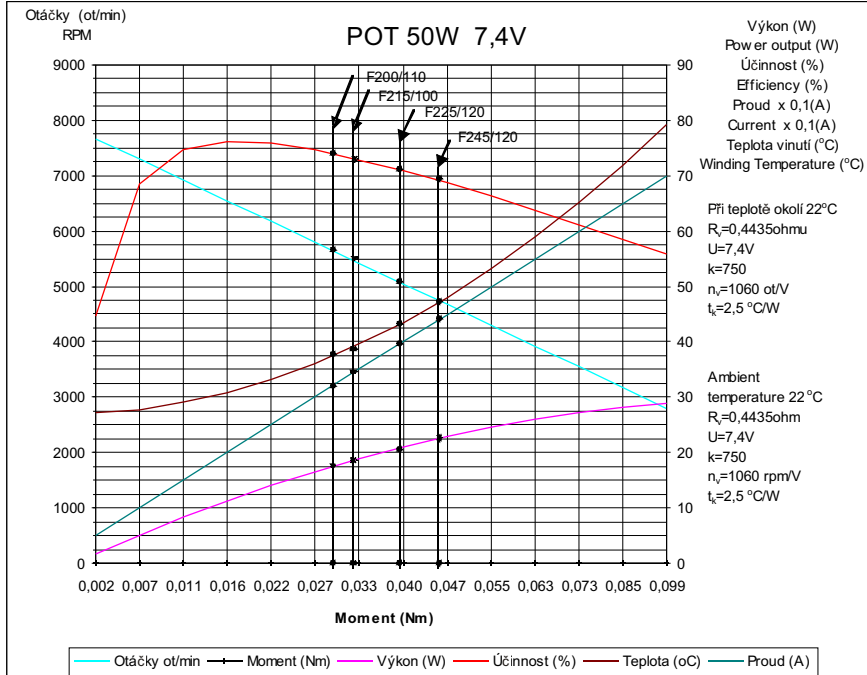

**POT 50W**  
Napájení.....2-3 LiPoly  
Nebo.....6 až 10 NiCd/NiMH  
Proud (11,5V).....6A  
Otáčky.....7900/min  
Vrtule.....F200/110  
Max. účinnost(11,5V, 3.3A).....78%  
Max. trvalý proud.....6,5A  
Předstih (doporučený).....15°  
Hmotnost motoru.....27g  
Hmotnost lože.....3g  
Baterie 3x 340mAh(LiPoly).....30g

**POT 50W**  
Power supply.....2-3 LiPoly  
Or.....6 to 10 NiCd/NiMH  
Current (11,5V).....6A  
RPM.....7900/min  
PROP.....F200/110  
Max. efficiency(11,5V, 3.3A).....78%  
Max. current.....6,5A  
Advance (recommended).....15°  
Motor weight.....27g  
Collar weight.....3g  
Battery 3x340mAh(LiPoly).....30g

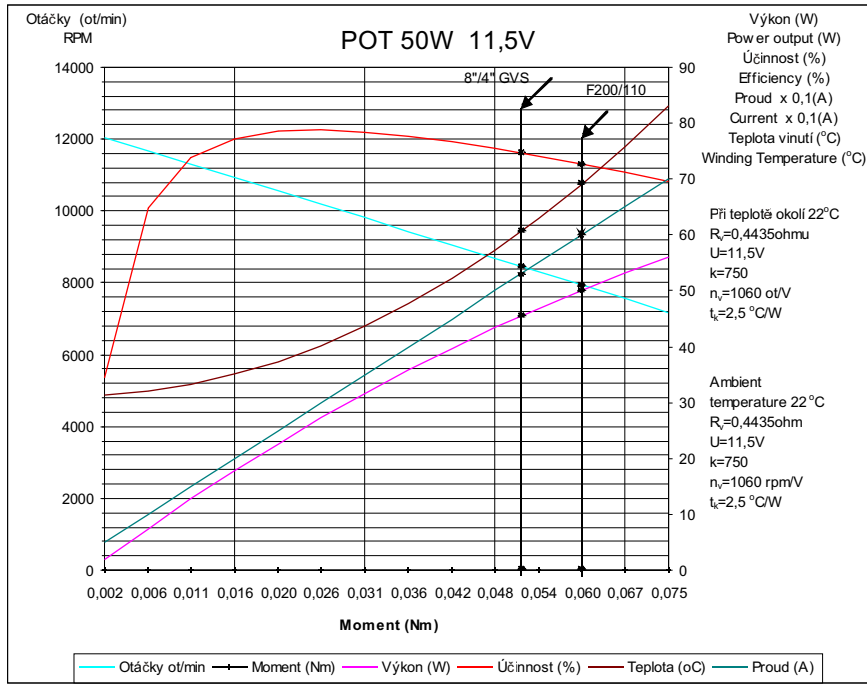

**POT 50W**  
Doporučené vrtule  
Recommended propellers  
Napájení - 2LiPoly  
Power supply-2LiPoly  
8"/6" , 9"/4,3" GWS  
9"/3,8" APC  
200/110F Potensky  
215/100F Potensky  
225/120F Potensky  
245/120F Potensky  
Napájení - 3 LiPoly  
Power supply-3LiPoly  
7"/6" , 8"/4" , 8"/4,3" , GWS  
7"/4" , 9"/3,8" APC  
200/110F Potensky

